

Capatect-Rolleck 042

Edge protecting glas fabric strip with foldable interior backing




Product Description

Field of Application	<p>Reinforcement fabric angle, used as edge protection and as gauge within the Capatect ETICS* Systems A and B. Especially for non-rectangular edges. *ETICS = External Thermal Insulation Composite System <i>Brit. term:</i> EWI = External Wall Insulation <i>Am. term:</i> EIFS = External Insulation and Finish System</p> <p>For embedding in reinforcing mortars and surfacers:</p> <ul style="list-style-type: none"> ■ Capatect-Klebe- und Spachtelmasse 190 ■ Capatect-Klebe- und Armierungsmasse 186M ■ Capatect-Klebe- und Armierungsmasse 133 Leicht ■ Capatect-ArmaReno 700 ■ Capatect-CS-Armierungsmörtel 850 ■ Capatect-ZF-Spachtel 699 ■ CarbonSpachtel ■ CarboNit
Material Properties	<ul style="list-style-type: none"> ■ Glas fabric strip (250 mm width) with centered synthetic backing ■ Can be folded in almost every corner (sharp or blunt) due to two separate backing strips. ■ Edges can be prepared very exactly ■ Overlaps fabric from both sides - no special fabric folding around the edges ■ Reveals and window leading edges can be treated in one step ■ High standard glas fabric quality made from Capatect-Gewebe 650 (for technical date see TI 650)
Packaging/Package Size	Carton as dispenser containing 1 role of 25 m
Colours	Orange
Storage	Dry, protected from moisture
Product No.	042/00

Application

Substrate Preparation	Leading edges of insulation boards must be cut accurately, and be clean, dry, firm/solid, sound and free from all material that may prevent good adhesion.
Method of Application	<p>Place the Capatect-Rolleck (edge protecting profiles) along the edges fully embedded (not fixed by spots) into the reinforcement mortar. Overlap fabric in bar joints for 10 cm. Do not double inner side backing (can easy be cut).</p> <p>For reinforcing of reveals cut glas fabric leg into reveals depth</p>

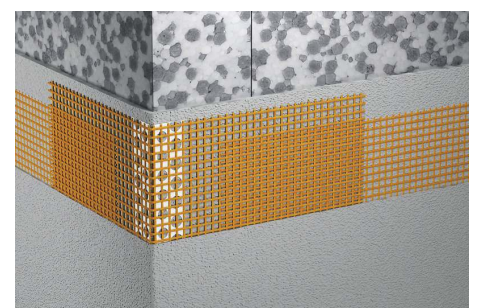

Consumption
Application Conditions

Place the over-all reinforcing fabric Capatect-Gewebe 650/110 with an overlapping of 10 cm to the Capatect-Rolleck at both sides. Do not fold it around the edge.

per m: 1.0 m

See Technical Information of the used reinforcement mortar.

Advice

Disposal

Dispose materials and all related packaging in a safe way in accordance with the full requirements of the local authorities.

Particular attention should be made to removing wastage from site in compliance with standard construction site procedures.

For EU: Dispose material residues as per EWC (European Waste Catalogue) 101103 (old glass fibre materials) or according to EWC 170904 (mixed construction and demolition waste).

Customer Service Centre

Tel.: (+49) 0 61 54 / 71 17 10

Fax: (+49) 0 61 54 / 71 17 11

e-mail: kundenservicecenter@caparol.de

International Distribution: Please see www.caparol.com