

Capatect Putzabschlußprofil 661

Capatect Plasterstop 661

Plastic profile for plaster area limitations with gauge and reinforcing fabric strip




Product Description

Field of Application	For clean lateral zoning of renders and grouts to achieve clean side boundary within smooth and textured render. Also as accurate stripline for color changes within a render area.
Material Properties	<ul style="list-style-type: none"> ■ Perforated plastic angle with gauge ■ Fabric stripe based on Capatect-Gewebe 650 (identic quality - no mismatch) ■ UV-resistant ■ Clean zoning ■ Resistant to aging ■ Simple processing
Packaging/Package Size	Carton containing 25 units of 2.5 m lengths; in total 62.5 m.
Colours	Profile body: white Fabric strip: orange
Storage	Horizontal without applied loads, protected from direct sunlight
Technical Data	<ul style="list-style-type: none"> ■ Profile width 24 mm ■ Gauge height 5 mm ■ Profil length 2.50 m ■ Width of fabric strip about 130 mm
Product No.	661

Application

Substrate Preparation	The substrate must be smooth, clean, solid, stable and free from all substances that might prevent adhesion.
Consumption	per 1 meter stripline: 1,0 m plus offcuts
Application Conditions	Processing temperature: + 5 °C to + 30 °C for ambient air and substrate
Installation	<p>Allow curing of the reinforcement before applying the Capatect-Putzabschlußprofil 661. The profil is aligned horizontally and vertically with butt joints in line and mitre cuts on edges: Apply reinforcing mortar for full embedding of profile and side strip.</p> <p>Embed profile and smooth the surface. Fabric strip always under final coating. Take care of water flow. Avoid protruding edges. Further processing after curing of the adhesive.</p> <p>Apply final coat up to the gauge to avoid water leaks.</p> <p>The gauge stays visible.</p>

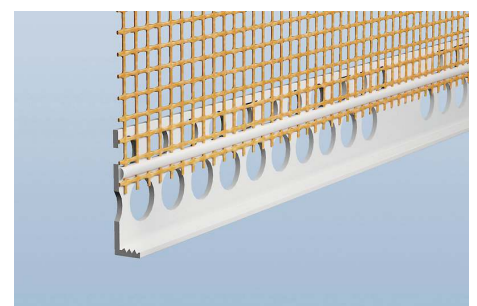

Advice

Disposal

Materials and all related packaging must be disposed in a safe way in accordance with the full requirements of the local authority.
Dispose dried/hardened product residues as mixed construction site and demolition waste.

Customer Service Centre

Tel.: +49 6154 71-71710
Fax: +49 6154 71-71711
e-mail: kundenservicecenter@caparol.de

International Distribution: Please see www.caparol.com